


斗式提升机链
Bucket Elevator Chains

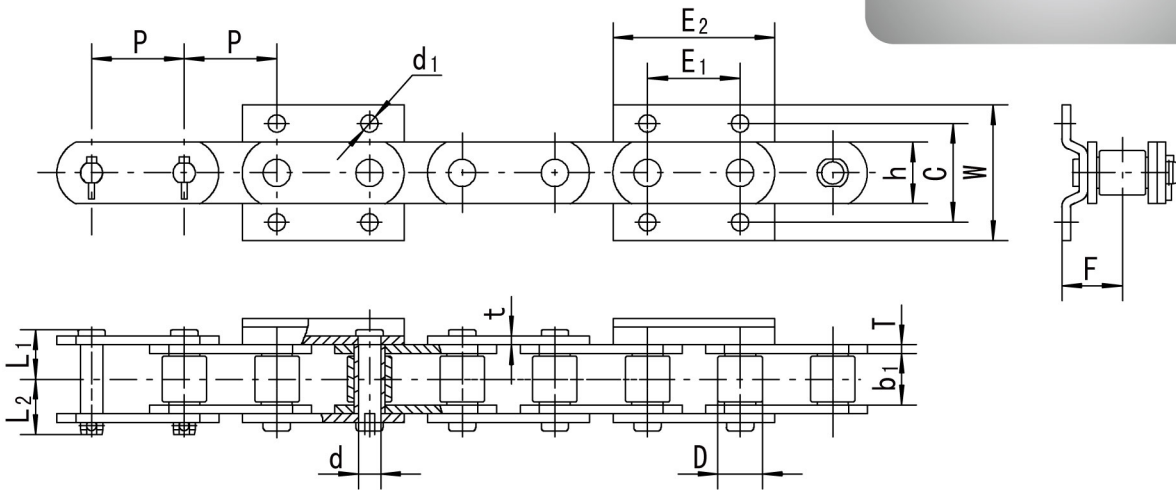

链号 Chain No.	E ₁	E ₂	C	W	d ₁	F	连接销轴 Pin & Cotter Type
NSE200	100	148	100	156	18	59	A
NSE200A	100	148	100	156	18	59	B
NSE400	100	157	100	137	18	67	B
NSE400A	100	180	115	155	18	67	B
NSE400B	100	180	115	153	18	71.4	B
NSE400C	100	157	100	137	18	67	B
NSE400B	75	132	90	124	14	50	A
NSE400B	125	226	136	176	18	83	B

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner Sidebars b ₁ (min) mm	滚子 外径 Roller diameter D (max) mm	销轴 Pin			链板 Sidebar		最小抗拉 强度 Ultimate tensile strength Q _{min} kN	每米净重 Weight per meter q kg/m
				d mm	L ₁ mm	L ₂ mm	h mm	t/T mm		
NSE200	100	50	46	22	51.9	59.6	60	10	450	24.3
NSE200A	100	50	46	22	51.9	60.9	60	10	450	24.3
NSE400	100	53.7	50	24	53.9	66.6	68	10	630	28.7
NSE400A	100	53.7	50	26	57.9	70.1	68	12	630	34.86
NSE400B	100	60	55	28	61.4	83.6	78	12	790	41.68
NSE400C	100	53.7	48	24	53.9	66.6	68	10	630	28.02
NSE100	75	43.6	39	20	44.1	51.2	56	8	375	20.27
NSE500A	125	80	70	38	77	96	110	14	1100	67.11