


冷饮食品链

Cold Drink & Food Processing Chains

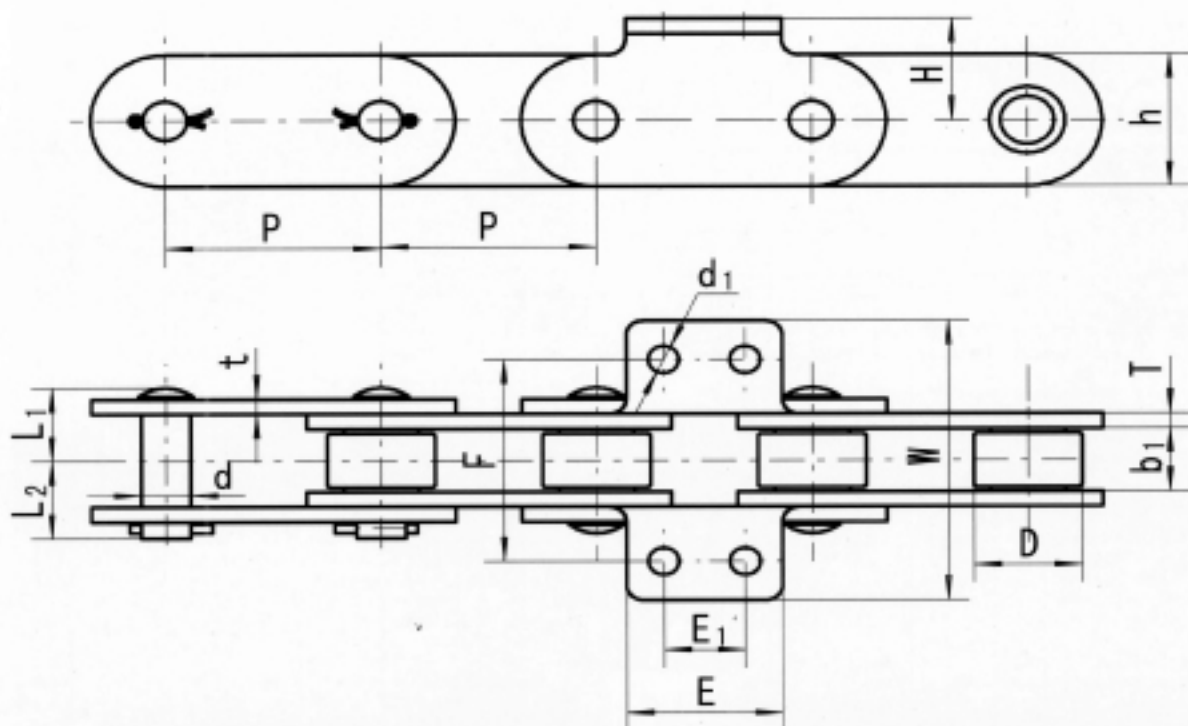

链号 Chain No.	E_1 mm	E mm	F mm	W mm	H mm	d_1 mm
C216AL-K ₂ B	19.1	39	51	71	18	6.6
C216AL-BK ₂ ·N ₁	19.1	39	51	71	18	6.6
C210A-K ₂	12	25	31.8	48	11	5.2
C210D-K ₂	12	25	31.8	48	12.5	5.2
C210E	12	25	35	48	17	4.5
C210F	12	25	31.8	47.8	12.5	5.4

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner plates b_1 (min) mm	滚子外径 Roller diameter D(max) mm	销 轴 Pin			链 板 Plate		最小抗 拉强度 Ultimate tensile strength Q(min) kN
				d mm	L_1 mm	L_2 mm	h mm	t/T mm	
C216AL-K ₂ B	50.8	15.75	28.58	7.92	16.35	18.85	23.5	3	40
C216AL-BK ₂ ·N ₁	50.8	15.75	28.58	7.92	16.35	18.85	23.5	3	40
C210A-K ₂	31.75	9.4	10.16	5.08	10.95	13.05	15	2	16
C210D-K ₂	31.75	9.4	11.91	5.94	12.05	13.45	16.6	2.4	23.3
C210E	31.75	10.5	15.88	7.4	12.95	15.05	22	2.5	25
C210F	31.75	9.4	10.16	5.08	11.75	14.05	15	2.4	22.1