



斗式提升机链

Bucket Elevator Chains

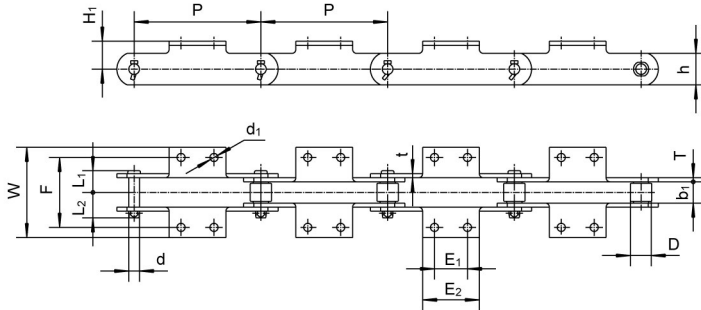

链号 Chain No.	E ₁	E ₂	F	W	d ₁	H ₁
M224T-S-250-BK ₂	65	112	140	180	16	55
M315T-S-315-BK ₂	100	150	160	216	18	65

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner Sidebars b ₁ (min) mm	滚子 外径 Roller diameter D (max) mm	销轴 Pin			链板 Sidebar		最小抗拉 强度 Ultimate tensile strength Qmin kN	每米净重 Weight per meter q kg/m
				d mm	L ₁ mm	L ₂ mm	h mm	t/T mm		
M224T-S-250-BK ₂	250	43	42	21	44.4	50.8	60	8	224	15.35
M315T-S-315-BK ₂	315	48	50	25	51.1	58.9	70	10	315	22.5

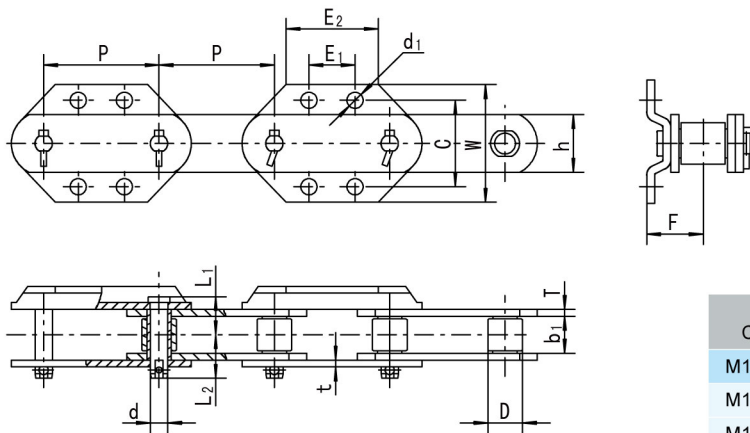

链号 Chain No.	E ₁	E ₂	C	W	d ₁	F
M112*100TA	40	80	75	102	14	40
M112*150TA	75	100	75	102	14	40
M112*150TB	75	100	75	102	14	40
SSN150-H4	75	116	100	141	18	63.6

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner Sidebars b ₁ (min) mm	滚子 外径 Roller diameter D (max) mm	销轴 Pin			链板 Sidebar		最小抗拉 强度 Ultimate tensile strength Qmin kN	每米净重 Weight per meter q kg/m
				d mm	L ₁ mm	L ₂ mm	h mm	t/T mm		
M112*100TA	100	32	30	15	34	37	40	6	112	5.79
M112*150TA	150	32	30	15	34	37	40	6	112	7.39
M112*150TB	150	30	29	15	32.8	36.3	40	6	200	7.57
SSN150-H4	150	54.5	50	25	54.6	64.4	72	9.8	460	24.43